


Kinetic PREMIER

SERIES™

WATER SOFTENERS

Model S350



System Components

Media Vessel (Qty.) Size	(2) 10" x 54"
Media Vessel Construction	Wrapped Polyethylene
Empty Bed Volume	2.19 ft ³
Media Type	Non Solvent Cation Resin
Media Volume	1.5 ft ³
Bed Depth	39"
Free Board	15"
Riser Tube	1" ABS
Distributor Upper	0.014" Slots, ABS Basket
Lower	0.014" Slots, ABS Basket
Under bedding	None
Regeneration Control	Non-electric Use Meter
Regeneration Type	Countercurrent
Meter Type	0.30 - 25.00 gpm Polypropylene Turbine

Inlet Water Quality

Pressure Range	15 – 125 psi Dynamic Pressure
Temperature Range	34 – 120° F
pH Range	5 – 10 SU
Free Chlorine Cl ₂ (Max.)	2.0 mg/L
Hardness as CaCO ₃ (Max.)	156 gpg

Operating Specs

Flow Range (15 / 30 psig)	12.0 – 19.0 gpm
Flow Configuration	Alternating
Dimensions (Width x Depth x Height)	21" x 10" x 60"
Weight (Operating / Shipping)	350 / 175 lbs.

Connections

Inlet / Outlet Connections	Custom E-clip Adapter
Drain Connection	0.5" Tube
Brine Line Connection	0.375" Tube
Power	None

System Part Numbers



Premier S350, 18 x 35 brine drum	15087
Premier S350, no brine drum	15088
Premier S350, no brine drum, no resin	15089

Brine Tank Options

Tank Description	K-Spray	18 x 35
Brine Tank Part Number	9763A	7938
Tank Height	35"	35"
Tank Footprint	18" DIA	18" DIA
Material	HDPE	HDPE
Salt Capacity	250 lbs.	250 lbs.

Regeneration Specifications

Regeneration Volume	102 gallons
Regeneration Time	90 minutes
Backwash Flow Control	3.00 gpm
Brine Refill Flow Control	0.70 gpm

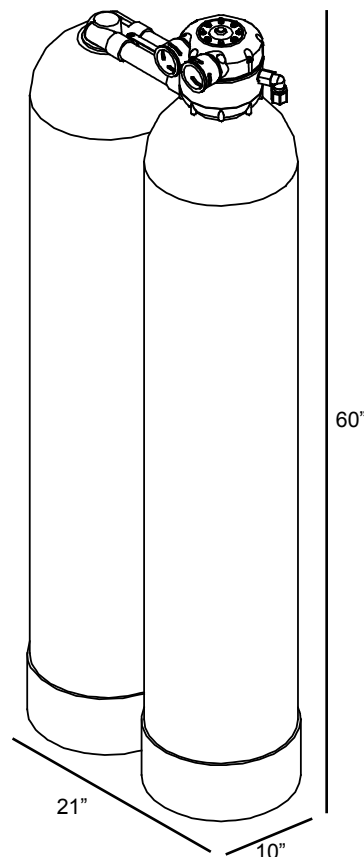

Salt Setting	Capacity	Efficiency	Dosing
**5.5 lbs.	24,626 grains	4,477 gr./lb.	3.7 lbs./ft ³
7.5 lbs.	30,843 grains	4,112 gr./lb.	5.0 lbs./ft ³
**10.0 lbs.	38,308 grains	3,830 gr./lb.	6.7 lbs./ft ³
15.0 lbs.	42,611 grains	2,840 gr./lb.	10.0 lbs./ft ³

**Settings certified by WQA

Kinetico PREMIER

SERIES™

WATER SOFTENERS

Model S350

Operating Profile

Softener shall remove hardness to less than 1/2 gpg when operated in accordance with the operating instructions. The system shall include two tanks. This duplex configuration shall operate with one tank on-line during service. During regeneration cycles, one tank shall provide water to service and to the regenerating tank. A water meter shall initiate system regeneration. The water meter shall measure the processed volume and be adjustable. Service flow shall be downflow and regeneration flow shall be upflow.

Regeneration Control Valve

The regeneration control valve shall be top mounted (top of media tank), and manufactured from non-corrosive materials. Control valve shall not weigh more than four pounds. Control valve shall provide service and regeneration control for two media tanks. Inlet and outlet ports shall accept a quick connect, double O-ring sealed adapter. Interconnection between tanks shall be made through the regeneration valve with a quick connect adapter. Control valve shall operate using a minimum inlet pressure of 15 psi. Pressure shall be used to drive all valve functions. No electric hook-up shall be required. Control valve shall incorporate four operational cycles including; service, brine draw, slow rinse, and a combined fast rinse and brine refill. Service cycle shall operate in a downflow direction. The brine cycle shall flow upflow, opposite the service flow, providing a countercurrent regeneration. Control valve shall contain a fixed orifice eductor nozzle and self-adjusting backwash flow control. The control valve will prevent the by-pass of hard water to service during the regeneration cycle.

Media Tanks

The tanks shall be designed for a maximum working pressure of 125 psi and hydrostatically tested at 300 psi. Tanks shall be made of polyethylene and reinforced with a fiberglass wrapping. Each tank shall include a 2.5 in. threaded top opening. Each tank shall be NSF approved. Upper and lower distribution system shall be of a slot design. Distributors will provide even flow of regeneration water and the collection of processed water.

Conditioning Media

Each softener shall include non solvent cation resin having a minimum exchange capacity of 30,000 grains/ft³ when regenerated with 15.0 lbs/ft³. The media shall be solid, of a proper particle size and shall contain no plates, shells, agglomerates or other shapes, which might interfere with the normal function of the water softener.

Brine System

A combination salt storage and brine production tank shall be manufactured of corrosion resistant, plastic. The brine tank shall have a chamber to house the brine valve assembly. The brine float assembly shall allow for adjustable salt settings and shall provide for a shutoff to the brine refill. The brine tank shall include a safety overflow connection to be plumbed to a suitable drain.